

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 1 060 901 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:

20.12.2000 Bulletin 2000/51

(51) Int. Cl.<sup>7</sup>: **B41M 5/00**

(21) Application number: **00202063.4**

(22) Date of filing: **13.06.2000**

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**

Designated Extension States:

**AL LT LV MK RO SI**

(30) Priority: **18.06.1999 GB 9914114**

(71) Applicant: **EASTMAN KODAK COMPANY**  
**Rochester, New York 14650 (US)**

(72) Inventor: **Baker, Julie**

**Harrow, Middlesex, HA1 4TY (GB)**

(74) Representative:

**Nunney, Ronald Frederick Adolphe et al**

**Kodak Limited,**

**Patent Department (W92)-3A,**

**Headstone Drive**

**Harrow, Middlesex HA1 4TY (GB)**

(54) **Inkjet ink image recording element**

(57) An image recording element for inkjet ink images comprises, in the following order,

a support;  
an absorbent base layer; and,  
a top layer which is ink receptive and comprises  
one or more hydrophilic polymers, gelatin, a  
crosslinking agent for gelatin and a humectant.

**EP 1 060 901 A2**

## Description

## Field of the Invention

5 [0001] This invention relates to inkjet ink imaging, particularly inkjet ink image recording elements.

## Background of the Invention

10 [0002] In a typical inkjet recording or printing system, ink droplets are ejected from a nozzle at high speed towards a recording element or medium to produce an image on the medium. The ink droplets, or recording liquid, generally comprise a recording agent, such as a dye or pigment, and a large amount of solvent. The solvent, or carrier liquid, typically is made up of water, an organic material such as a monohydric alcohol or a polyhydric alcohol or a mixed solvent of water and other water miscible solvents such as a monohydric alcohol or a polyhydric alcohol.

15 [0003] The recording elements typically comprise a support or a support material having on at least one surface thereof one or more ink-receiving or image-forming layers. The elements include those intended for reflection viewing, which usually have an opaque support, and those intended for viewing by transmitted light, which usually have a transparent support.

20 [0004] While a wide variety of different types of image-recording elements for use with inkjet ink devices have been proposed heretofore, there are many unsolved problems in the art and many deficiencies in the known products which have severely limited their commercial usefulness. The requirements for an image-recording medium or element for inkjet recording are very demanding.

[0005] It is well known that in order to achieve and maintain photographic-quality images on such an image-recording element, the recording element must:

- 25 • Be readily wetted so there is no puddling, i.e. coalescence of adjacent ink dots, which leads to nonuniform density.
- Exhibit no image bleeding.
- Exhibit the ability to absorb high concentrations of ink and dry quickly to avoid elements blocking together when stacked against subsequent prints or other surfaces.
- 30 • Provide a high level of gloss and be sufficiently insoluble in typical ink solvents to avoid development of differential gloss.
- Exhibit no discontinuities or defects due to interactions between the support and/or layer(s), such as cracking, repellencies, comb lines and the like.
- Not allow unabsorbed dyes to aggregate at the free surface causing dye crystallization, which results in bloom or bronzing effects in the imaged areas.
- 35 • Have optimized image fastness to avoid fade from contact with water or radiation by daylight, tungsten light, or fluorescent light.

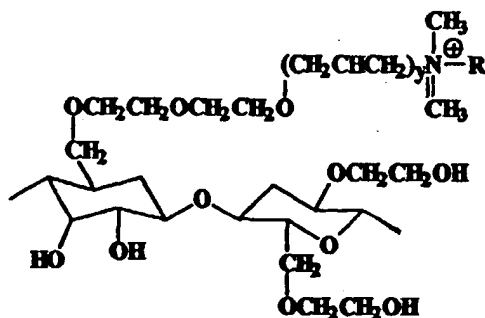
40 [0006] Inkjet ink image recording elements often have an overcoat or top layer coated on top of another ink-absorbing layer, particularly if the underlying layer contains gelatin or polymer. The overcoat layer can have various functions, such as to provide physical protection, reduce tackiness, provide a glossy appearance, offer an ink-receptive surface, carry specific components or allow easier manufacture. Overcoat layers are usually relatively thin in comparison to the thick underlying layer typically used for ink-jet receivers, often in the order of one micron in thickness and can comprise a variety of materials, including cellulose derivatives.

45 [0007] Methylcellulose and its derivatives possess characteristic thermal gelling, surfactant, non-ionic, thickening, film-forming, and adhesive properties coupled with extremely low toxicity. In addition, it is possible to adapt these materials to specific end uses by controlling the type and ratio of their modifying substituents as described in "Industrial Gums. Polysaccharides and their derivatives", Whistler, R.L., Academic press, Inc, 2nd edition, 1973. Thus, they have found application in a wide range of products including use in inkjet ink recording media.

50 [0008] US-A-5,789,070 describes an image recording element for inkjet ink images comprising, in the following order, a support, a base layer and a top layer, wherein:

the base layer comprises a hydrophilic material e.g. gelatin;

the top layer is ink receptive and comprises a cationically modified cellulose ether having the structure:

$X^{\ominus}$ 

; wherein

R represents  $C_nH_{2n+1}$ ;  
X represent halide; and  
n is 1 to 30.

#### Problem to be solved by the Invention

[0009] The present invention is concerned with improving the drying time of an image recording element for inkjet ink images.

[0010] It has been found that if the polymer e.g. gelatin laydown of an underlying ink-absorbing layer is increased, the time taken to dry a printed image (measured as the density of an image transferred to a piece of plain paper sandwiched to the printed image immediately after it exits the inkjet printer) can be reduced. However, to achieve a significant improvement in this measure, the polymer laydown in the ink-absorbing layer has to be almost doubled (e.g. 13.9 g/m<sup>2</sup> compared to 7.6 g/m<sup>2</sup>). This also results in an undesirable variability in gloss levels produced by different printed colours (signified by an increase in differential gloss, that is, the standard deviation of the gloss measurements taken from eight different colours).

[0011] The invention solves the problems associated with increasing the polymer content of an underlying ink-absorbing layer and avoids a large increase in the polymer content of the recording element.

#### Summary of the Invention

[0012] The invention provides an image recording element for inkjet ink images comprising, in the following order,

a support;

an absorbent base layer; and,

a top layer which is ink receptive and comprises one or more hydrophilic polymers, gelatin, a crosslinking agent for gelatin and a humectant.

#### Advantageous Effect of the Invention

[0013] The addition of gelatin, a crosslinking agent for gelatin and a humectant to a conventional overcoat layer consisting of hydrophilic polymers results in a significant improvement in both dry time and differential gloss.

#### Detailed Description of the Invention

[0014] In the present invention, the recording element can be opaque, translucent, or transparent. Thus, the supports utilized in the recording element of the present invention are not particularly limited and various supports may be employed. Accordingly, plain papers, coated papers e.g. resin-coated papers, various plastics including a polyester-type resin such as poly(ethylene terephthalate), poly(ethylene naphthalate) and polyester diacetate, a polycarbonate-

type resin, a fluorine-type resin such as ETFE, metal foil, and various glass materials can be employed as supports. When the supports are transparent, a transparent recording element can be obtained and used as a transparency in an overhead projector.

[0015] The supports employed in the present invention must be self-supporting. By "self-supporting" is meant a support material such as a sheet of film that is capable of independent existence in the absence of a supporting support.

[0016] The thickness of the support can be from 12 to 500  $\mu\text{m}$ , preferably from 75 to 300  $\mu\text{m}$ .

[0017] If desired, in order to improve the adhesion of the base layer to the support, the surface of the support may be corona-discharge-treated prior to applying the solvent-absorbing layer to the support or, alternatively, an under-coating, such as a layer formed from a halogenated phenol or a partially hydrolyzed vinyl chloride-vinyl acetate copolymer can be applied to the surface of the support.

[0018] The base layer is primarily intended as a sponge layer for the absorption of ink solvent. As such, it is primarily composed of hydrophilic or porous materials. It may have a thickness of 3 to 60  $\mu\text{m}$ .

[0019] Hydrophilic materials include gelatin, acetylated gelatin, phthalated gelatin, oxidized gelatin, chitosan, poly(alkylene oxide), poly(vinyl alcohol), modified poly(vinyl alcohol), sulfonated polyester, partially hydrolyzed poly(vinylacetate/vinyl alcohol), poly(acrylic acid), poly(1-vinylpyrrolidone), poly(sodium styrene sulfonate), poly(2-acrylamido-2-methane sulfonic acid), and polyacrylamide and mixtures of these materials. Copolymers of these polymers with hydrophobic monomers may also be used.

[0020] The hydrophilic material may be coated to provide a laydown of 3 to 60  $\text{g}/\text{m}^2$ , preferably 5 to 12  $\text{g}/\text{m}^2$ .

[0021] Other materials useful in the base layer include cellulose derivatives, gum derivatives, chitin starch, or other materials which are obvious to those skilled in the art.

[0022] A porous structure may be introduced into the base layer by the addition of ceramic or hard polymeric particulates, by foaming or blowing during coating, or by inducing phase separation in the layer through introduction of non-solvent.

[0023] A porous structure could be achieved by coating the ceramic or hard polymeric particulates to provide a laydown of 3 to 60  $\text{g}/\text{m}^2$ , preferably 20 to 50  $\text{g}/\text{m}^2$ .

[0024] In general, it is sufficient for the base layer to be hydrophilic, but not porous. This is especially true for photographic quality prints, in which porosity may cause a loss in gloss. Optionally, rigidity may be imparted to the base layer through incorporation of a second phase such as polyesters, poly(methacrylates), and polyvinyl benzene-containing copolymers.

[0025] In the preferred embodiment of this invention, the base layer is comprised of 50%-100% photographic-grade gelatin. The remainder of the layer may consist of a polymer or inorganic material compatible with said gelatin which does not adversely impact functional properties.

[0026] In yet another embodiment, a mordant may be added in small quantities (2%-10% by weight of the base layer) to further improve waterfastness. Useful mordants are disclosed in U.S. Patent 5,474,843.

[0027] In particular, the base layer may consist of any hydrophilic polymer or combination of polymers with or without additives as is well known in the art.

[0028] The top layer comprises one or more hydrophilic polymers. Examples of suitable hydrophilic polymers include cellulose derivatives e.g. nonionic cellulose ethers, anionic cellulose ethers and cationic cellulose ethers; polyvinyl alcohol, polyvinylpyrrolidone and sulfonated polyesters.

[0029] Useful cationically modified cellulose ether polymers include Celquat SC240C (hydroxyethyl cellulose reacted with trimethylammonium chloride substituted epoxide; National Starch and Chemical) and Quatrisoft LM-200 (hydroxyethyl cellulose reacted with a dodecyl dimethylammonium chloride substituted epoxide; Amerchol Corp.). A combination of A4M (methyl cellulose) and JR400 (hydroxyethyl cellulose reacted with a trimethyl ammonium chloride substituted epoxide) in a weight ratio of 80/20 provides another useful example of materials useful in forming the image recording layer.

[0030] The hydrophilic polymers may be present in the top layer in an amount from 0.1 to 3.0  $\text{g}/\text{m}^2$ , preferably from 0.5 to 1.5  $\text{g}/\text{m}^2$ .

[0031] The top layer contains gelatin which may be present in an amount from 20 to 80 weight %, preferably from 40 to 60 weight % based on the weight of the hydrophilic polymer in the top layer.

[0032] Examples of suitable crosslinking agents for gelatin are well known and include the range of organic and inorganic hardeners described in "The Theory of the Photographic Process" Fourth Edition, Chapter 3, page 77.

[0033] A preferred crosslinking agent is bis(vinylsulfonyl)methane.

[0034] The crosslinking agent for the gelatin may be present in the top layer in an amount from 0.01 to 0.5 weight %, preferably from 0.03 to 0.1 weight % based on the weight of the gelatin in the top layer.

[0035] The top layer also contains a humectant. Examples of suitable humectants include polyhydric alcohols and derivatives thereof such as glycerol, diethylene glycol, triethylene glycol, diethylene glycol mono-butyl ether, triethylene glycol mono-butyl ether and triethanolamine.

[0036] A preferred humectant is glycerol.

[0037] The humectant may be present in the top layer in an amount from 5 to 40 weight %, preferably from 10 to 30 weight % based on the total weight of the top layer.

[0038] Preferably, the top layer has a thickness of 0.1 to 3.0  $\mu\text{m}$ .

5 [0039] Since the image recording element may come in contact with other image recording articles or the drive or transport mechanisms of the image recording devices for which its use is intended, additives such as surfactants, lubricants and matte particles may be optionally added to the element to the extent that they do not degrade properties of interest.

10 [0040] The layers described above, including the base layer and the top layer, may be coated by conventional coating means onto a transparent or opaque support material commonly used in this art. Coating methods may include, but are not limited to wound wire rod coating, slot coating, slide hopper coating, gravure, and curtain coating. Some of these methods allow for simultaneous coatings of both layers, which is preferred from a manufacturing economic perspective.

[0041] The inks used to image the recording elements used in the present invention are well-known inks. The ink compositions used in ink-jet printing typically are liquid compositions comprising a solvent or carrier liquid, dyes or pigments, humectants, organic solvents, detergents, thickeners, and preservatives. The solvent or carrier liquid can be comprised solely of water or can be predominately water mixed with other water-miscible solvents such as polyhydric alcohols, although inks in which organic materials such as polyhydric alcohols are the predominant carrier or solvent liquid also may be used. Particularly useful are mixed solvents of water and polyhydric alcohols.

15 [0042] The dyes used in such compositions are typically water-soluble direct or acid type dyes. Such liquid compositions have been described extensively in the prior art including, for example, U.S. Pat. Nos. 4,381,946; 4,239,543 and 4,781,758.

20 [0043] Although the recording elements disclosed herein have been referred to primarily as being useful for ink-jet printers, they also can be used as recording media for pen plotter assemblies. Pen plotters operate by writing directly on the surface of a recording medium using a pen consisting of a bundle of capillary tubes in contact with an ink reservoir.

25 [0044] The following example further illustrates the invention and the benefits flowing therefrom.

#### Example

30 [0045] For comparison with the invention, a resin-coated paper support, was coated on the back side with a gelatin layer to control curl. The front side was coated with, in order, a gelatin ink-absorbing layer and an overcoat layer comprising cellulose derivatives.

[0046] It was found that if the gelatin laydown of the underlying ink absorbing layer was increased, the time taken for a printed image to dry was reduced. However, to achieve a significant improvement in the dry time, the gelatin laydown in the ink absorbing layer had to be almost doubled (13.9  $\text{g}/\text{m}^2$  compared to 7.6  $\text{g}/\text{m}^2$ ). This also resulted in an undesirable variability in the gloss levels produced by different printed colours (signified by an increase in differential gloss, that is, the standard deviation of the gloss measurements taken from eight different colours).

35 [0047] By contrast and in accordance with the invention, considerably lower levels of gelatin (approximately 0.5  $\text{g}/\text{m}^2$ ), together with a humectant (e.g. glycerol) and a gelatin cross-linker (e.g. BVSM) were added to an overcoat layer consisting of cellulose derivatives. The result of these modifications was a significant improvement in both dry time and differential gloss, that is, a dry time equivalent to that achieved with an ink absorbing layer containing 13.9  $\text{g}/\text{m}^2$  of gelatin but with significantly lower differential gloss, making the difference in the level of gloss between areas of different printed colours much less noticeable (if the differential gloss is 5 or below, the gloss difference is extremely difficult to detect visually).

40 [0048] The ink-absorbing layer was coated at a gelatin laydown of 7.63  $\text{g}/\text{m}^2$  and included 848  $\text{mg}/\text{m}^2$  of a cationic latex polymer [polymer of (m and p chloromethyl) ethenylbenzene and 2-methyl-2-propenoic acid 1,2-ethanediylester, quaternized with N,N-dimethylmethanamine] which acts as a mordant and 129.16  $\text{mg}/\text{m}^2$  of polymeric matte (limited coalescence polystyrene beads, 20 microns).

50 [0049] The overcoat consisted of a water soluble cationic cellulose ether (hydroxyethyl cellulose reacted with a dodecyl dimethylammonium chloride substituted epoxide) coated at 861.12  $\text{mg}/\text{m}^2$ , methyl cellulose (average molecular weight ~86,000) coated at 212.28  $\text{mg}/\text{m}^2$ , to which was added gelatin, coated at 0.5  $\text{g}/\text{m}^2$ , a humectant (glycerol) added at 23% of the dry laydown of the top layer and a gelatin cross linker (bis(vinyl sulfonyl)methane) at 0.00025  $\text{g}/\text{m}^2$  (0.05 weight % of the gelatin in the top layer).

55 [0050] The effect of this overcoat design in reducing the time taken for the printed image to dry was determined by measuring the density of ink transferred to a piece of plain paper sandwiched to a printed image immediately printing. The faster the sample dried, the lower the ink density on the plain paper.

[0051] The results in table 1 show the dry time ink density, % gloss, differential gloss and tackiness results for several gel laydowns in the ink absorbing layer (02G) and for some different overcoat formulations.

Table 1

02G Gel Laydown (g/m <sup>2</sup> )	03S Gel Laydown (g/m <sup>2</sup> )	03S Glyc-erol Lay-down (%)	03S BVSM Laydown (g/m <sup>2</sup> )	HP P/S Dry Time Ink Density	HP P/S % Gloss	HP P/S Differential Gloss	Tackiness
7.6	-	-	-	0.844	66.2	3.91	OK
10.9	-	-	-	0.547			OK
13.9	-	-	-	0.389	61.5	11.88	OK
7.6	0.5	23	0.00025	0.385	60.9	7.29	OK
7.6	0.5	-	0.00025	0.373	60.4	11.95	S.Tacky
7.6	0.5	23	-	0.385	62.5	8.37	OK

Key to Table 1:

02G represents the ink absorbing layer

03S represents the overcoat layer

HP P/S represents an HP PhotoSmart printer

Tackiness:

OK = non tacky

S.Tacky = slightly tacky

Printer set-up :

The HP PhotoSmart Printer was used with the following settings :

HP PhotoSmart Glossy Photographic Paper

"Best" print quality

PhotoSmart Best Colours

[0052] The results in Table 1 indicate that dry times equivalent to that achieved with an ink absorbing layer containing 13.9 g/m<sup>2</sup> of gelatin (but with significantly lower differential gloss) can be obtained by adding just 0.5 g/m<sup>2</sup> of gelatin to the overcoat.

[0053] If the gelatin is added to the overcoat in the absence of the humectant, dry time is unaffected but the coating becomes tacky and a larger differential gloss is seen. If the gelatin is added to the overcoat in the absence of a gelatin cross linker, dry time and gloss are unaffected, but a small increase in differential gloss is seen.

[0054] The data shown in Table 2 below indicate that this invention results in a reduction in the time taken to dry a printed image for two printers and ink sets. In this example, the experimental coating embodying the invention (Inv) transferred less ink in both cases when compared to a typical commercial product, in this case, Kodak Ink jet Photographic Quality Paper (Gen 2).

Table 2

Coating	HP PhotoSmart Dry Time Ink Density	Epson Stylus Photo 700 Dry Time Ink Density
Gen 2	0.844	2.231
Inv	0.380	0.803

Printer set-ups :

The HP PhotoSmart printer was used with the following settings :

HP PhotoSmart glossy photographic paper

"Best" print quality

PhotoSmart best colours

The Epson Stylus Photo 700 printer was used with the following settings:

Photo Quality Ink Jet Paper

1440 dpi

Photo quality

# Claims

1. An image recording element for inkjet ink images comprising, in the following order,
  - a support;
  - an absorbent base layer; and,
  - a top layer which is ink receptive and comprises one or more hydrophilic polymers, gelatin, a crosslinking agent for gelatin and a humectant.
2. An image recording element according to claim 1 wherein the top layer comprises one or more hydrophilic polymers selected from nonionic cellulose ethers, anionic cellulose ethers, cationic cellulose ethers, polyvinyl alcohol, polyvinylpyrrolidone and sulfonated polyesters.
3. An image recording element according to claim 1 or claim 2 wherein the hydrophilic polymers are present in the top layer in an amount from 0.5 to 1.5 g/m<sup>2</sup>.
4. An image recording element according to any one of the preceding claims wherein the gelatin is present in the top layer in an amount from 20 to 80 weight % based on the weight of the hydrophilic polymer in the top layer.
5. An image recording element according to any one of the preceding claims wherein the gelatin is present in the top layer in an amount from 40 to 60 weight % based on the weight of the hydrophilic polymer in the top layer.
6. An image recording element according to any one of the preceding claims wherein the crosslinking agent in the top layer is bis(vinylsulfonyl)methane.
7. An image recording element according to any one of the preceding claims wherein the crosslinking agent is present in the top layer in an amount from 0.03 to 0.1 weight % based on the weight of the gelatin in the top layer.
8. An image recording element according to any one of the preceding claims wherein the humectant in the top layer is selected from glycerol, diethylene glycol, triethylene glycol, diethylene glycol mono-butyl ether, triethylene glycol mono-butyl ether and triethanolamine.
9. An image recording element according to any one of the preceding claims wherein the humectant is present in the top layer in an amount from 10 to 30 weight % based on the total weight of the top layer.
10. An image recording element according to any one of the preceding claims wherein the hydrophilic material in the base layer comprises gelatin.

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 060 901 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
30.01.2002 Bulletin 2002/05

(51) Int Cl.7: **B41M 5/00**

(43) Date of publication A2:  
20.12.2000 Bulletin 2000/51

(21) Application number: **00202063.4**

(22) Date of filing: **13.06.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Baker, Julie**  
**Harrow, Middlesex, HA1 4TY (GB)**

(30) Priority: **18.06.1999 GB 9914114**

(74) Representative:  
**Nunney, Ronald Frederick Adolphe et al**  
**Kodak Limited, Patent Department (W92)-3A,**  
**Headstone Drive**  
**Harrow, Middlesex HA1 4TY (GB)**

(71) Applicant: **EASTMAN KODAK COMPANY**  
**Rochester, New York 14650 (US)**

**(54) Inkjet ink image recording element**

(57) An image recording element for inkjet ink images comprises, in the following order,

a support;  
an absorbent base layer; and,

a top layer which is ink receptive and comprises one or more hydrophilic polymers, gelatin, a crosslinking agent for gelatin and a humectant.

**EP 1 060 901 A3**





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 20 2063

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	EP 0 829 375 A (MITSUBISHI PAPER MILLS LTD) 18 March 1998 (1998-03-18) * page 5, line 2 - line 50 * * page 28, line 48 - line 51 * * examples *	1-10	B41M5/00
Y	US 4 575 465 A (VIOLA MICHAEL S) 11 March 1986 (1986-03-11) * the whole document *	1-10	
A	EP 0 869 010 A (ILFORD AG) 7 October 1998 (1998-10-07) * page 4, line 24 - page 6, line 31 * * page 6, line 53 - page 7, line 1 * * page 9, line 40 - line 52 * * tables 2,20 *	1-10	
A	EP 0 701 902 A (AGFA GEVAERT NV) 20 March 1996 (1996-03-20) * page 3, line 9 - page 4, line 10 * * page 7, line 27 - line 32 * * page 8, line 3 - line 13 *	1-10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B41M
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>4 December 2001</b>	Examiner <b>Whelan, N</b>
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &amp;: member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 B2 (P4C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 20 2063

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-12-2001

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0829375	A	18-03-1998	JP	9314991 A	09-12-1997
			DE	69700647 D1	25-11-1999
			DE	69700647 T2	31-05-2000
			EP	0829375 A1	18-03-1998
			US	6083609 A	04-07-2000
			WO	9735730 A1	02-10-1997
US 4575465	A	11-03-1986	CA	1249716 A1	07-02-1989
			DE	3576671 D1	26-04-1990
			EP	0184797 A2	18-06-1986
			JP	1831860 C	29-03-1994
			JP	5042357 B	28-06-1993
			JP	61143177 A	30-06-1986
EP 0869010	A	07-10-1998	EP	0869010 A1	07-10-1998
			DE	69700228 D1	24-06-1999
			DE	69700228 T2	16-12-1999
EP 0701902	A	20-03-1996	EP	0701902 A1	20-03-1996
			DE	69407288 D1	22-01-1998
			DE	69407288 T2	09-07-1998
			JP	8156398 A	18-06-1996

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82